




Practical, fast and easy to use for testing voltage and continuity

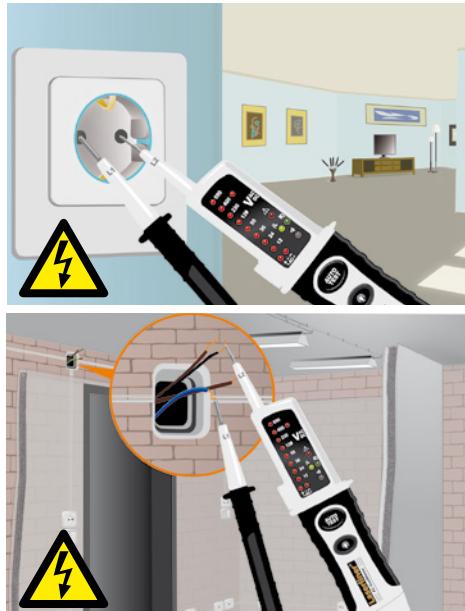

- Reliable and fast voltage tester with the most commonly used nominal voltages
- Automatic AC voltage and DC voltage test
- Automatic range and function changeover for direct testing and measurement
- Single-phase and rotary field test with phase sequence display
- Single-pole phase testing
- Automatic continuity tester with acoustic signal
- CAT III - 1000 V – can be used for measurements throughout building installations
- Safety self-test (AC warning) as from 50 V, operates in emergency mode without battery
- Super-bright LED lighting for integrated test point illumination
- Rugged, practical enclosure with lockable test prod spacing (for standard EU connector)

TECHNICAL DATA

VOLTAGE RANGE	12, 24, 36, 50, 120, 230, 400, 690 V AC/DC
VOLTAGE DETECTION	Automatic
PEAK CURRENT	$I_s < 0.2 \text{ A}$ / $I_s (5 \text{ s}) < 3.5 \text{ mA}$
FREQUENCY RANGE	50/60 Hz
SINGLE-POLE PHASE TEST	Voltage range 100...690 V AC (50/60 Hz)
CONTINUITY TEST	Resistance range $< 300 \Omega$ Test current 5 μA Overvoltage protection 690 V AC/DC
ROTARY FIELD DIRECTION INDICATOR	Voltage range (LEDs) 100...400 V Frequency range 50/60 Hz
OVERVOLTAGE CATEGORY	CAT II 1000 V with protective cover: CAT III 1000 V / CAT IV 600 V
POLLUTION DEGREE	2
TYPE OF PROTECTION	IP 64
POWER SUPPLY	2x 1.5 TYPE AAA, LR03, ALKALINE
OPERATING TEMPERATURE	-10 °C ... 55 °C
WEIGHT	220 g



ActiveMaster

+ protective covers
+ batteries (2 x 1.5V AAA)

Package size (W X H X D)
190 x 310 x 75 mm

