















# Oversigt over momentværktøjer:


Værktøjer	Præcision	Indstilling	Særlig egenskab	Nm-område	Momentområder				
					0,01 Nm	0,1 Nm	1 Nm	10 Nm	20 Nm
<b>iTorque</b> 	± 6 %	variabel	Digitalt display ClickControl ClickControl Numerisk skala	0,4 – 1,5 0,8 – 3,0 1,0 – 5,0					
<b>TorqueVario®-S</b> 	± 10 % ± 6 %/± 10 % ± 6 %	variabel	Numerisk skala	0,04 – 0,46 0,1 – 0,6 0,4 – 1,0 0,5 – 2,0 0,8 – 5,0 2,0 – 7,0					
<b>TorqueVario®-S ESD</b> 	± 10 % ± 6 %/± 10 % ± 6 %	variabel	ESD-kompatibel Numerisk skala	0,04 – 0,46 0,1 – 0,6 0,4 – 1,0 0,5 – 2,0 0,8 – 5,0					
<b>TorqueFix®</b> 	± 6 %	fast	Fast indstillet fra fabrikken	16 Versioner 0,4 – 7,2					
<b>easyTorque</b> 	± 10 %	fast	Fast indstillet fra fabrikken	13 Versioner 0,5 – 5,0					
<b>TorqueFix® Key</b> 	± 6 %	fast	Fast indstillet fra fabrikken	0,5 – 4,0					
<b>easyTorque-adapter</b> 	± 10 %	fast	VDE-certificering Fast indstillet fra fabrikken	5 Versioner 0,8 – 4,0					
<b>TorqueVario®-S VDE</b> 	± 6 %	variabel	VDE-certificering Numerisk skala	0,5 – 2,0 0,8 – 5,0 2,0 – 7,0					
<b>TorqueVario®-S T electric</b> 		variabel	VDE-certificering Numerisk skala	5 – 14					
<b>Momentnøgle electric</b> 	± 4 %	variabel	VDE-certificering Numerisk skala	5-25					
<b>TorqueVario®-S T</b> 	± 6 %	variabel	Numerisk skala	5,0 – 14					
<b>TorqueFix®-T</b> 	± 6 %	fast	Fast indstillet fra fabrikken	6 Versioner 6,0 – 14					

## Udskiftelige klinger


Serie 2859

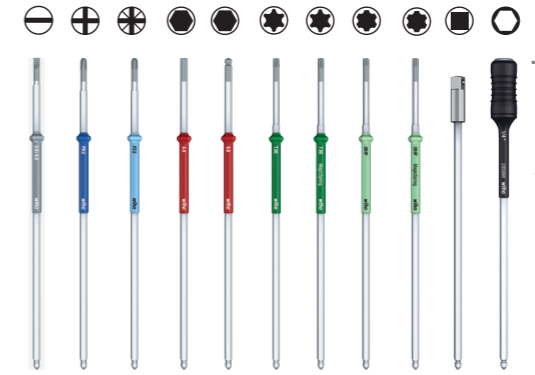


Serie 28369



slimBits  
Serie 2831



Serie 28379



Serie 7207 (3/8")  
Serie 7209 (1/4")



Serie 2899

